


sti-P<sub>3</sub>®

5,000 GALLON TANK  
Part Number AC05000U1P1

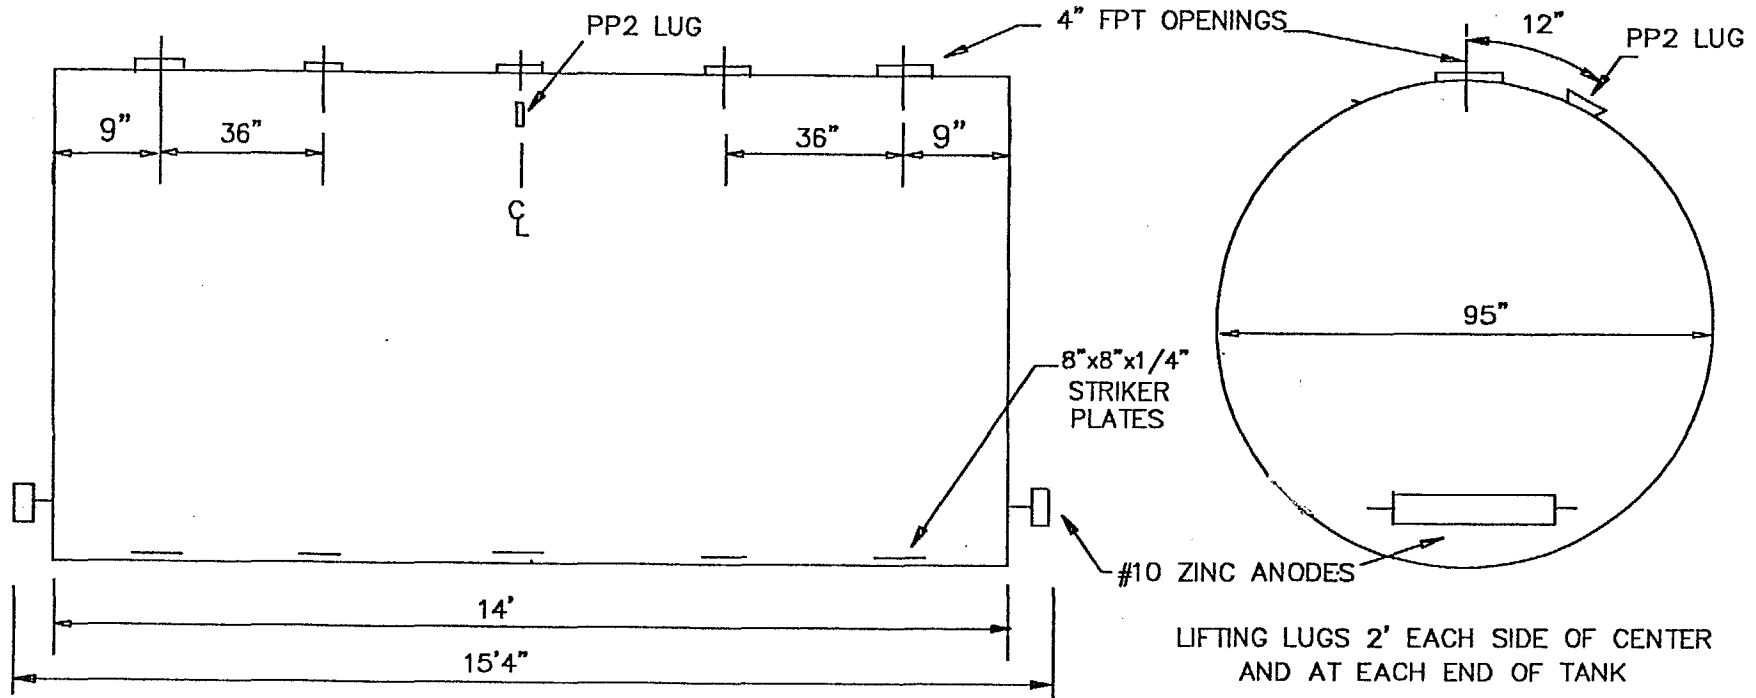


Weight 5,180 lbs. \_\_\_\_\_

Shell Thickness 2 gauge \_\_\_\_\_

Head Thickness 2 gauge \_\_\_\_\_

NOTICE  
THIS PRINT AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO ACE TANK & EQUIPMENT CO. AND SHALL NOT BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART, NOR USED FOR ANY DESIGN OR MANUFACTURING PURPOSES, UNLESS AUTHORIZED IN WRITING BY ACE TANK & EQUIPMENT CO.

 <b>ACE TANK &amp; EQUIPMENT CO.</b> SEATTLE PORTLAND HAYWARD		
FOR: _____		
JOB: _____		
NOT TO SCALE	<input type="radio"/>	REQUIRED
INVOICE #	DATE	SALESPERSON

Openings are female NPT and are bushed to size indicated by using nylon bushings per sti-P<sub>3</sub>® specs.  
Before coating, tank shall be tested and proved tight under a test pressure between 5 and 7 psi.  
Exterior coating per sti-P<sub>3</sub>® specs.  
Tanks shall be built in accordance with UL-58 specifications and shall bear the UL and sti-P<sub>3</sub>® labels.

Drawing not to scale. Weights & measurements are approximate.

\_\_\_\_\_  
CUSTOMER APPROVAL SIGNATURE