

**UL-142 FuelSafe System****DISPENSING PACKAGE:****DIESEL PUMP PACKAGE**

Includes:

- 20 GPM, 115 VAC, 1/3 HP Pump w/ 999.9 Gallon Register and Vacuum Breaker (1" Discharge)
- 30-Micron Hydrosorb Filter, up to 25 GPM w/ Adaptor
- 1" x 12" Whip Hose
- Reconnectable Breakaway Valve
- 1" x 20' Hose (*Other Lengths Available*)
- Multi-plane Hose Swivel
- Diesel High Flow Fueling Nozzle

TANK PACKAGE:**ABOVEGROUND STORAGE TANK**

UL-142 Double Wall Skid Tank, Powder Coat Finish Paint, with Two-Step Bolt-on Stairs (*550 /1100 Only*).

Tank Package Includes:Fill Package

- Top Mounted Spill Containment
- Overfill Prevention Valve
- Dust Cap

Venting Package

- Emergency Venting
- Atmospheric Vent with Riser

Mechanical Gauging Package

- At-a-Glance Level Gauge (*As Shown Above*)
- (*Optional*) Clock Gauge (*Not Shown Above*)
- At-a-Glance Leak Gauge
- Watertight Gauge Stick Port w/ Gauge Stick & Laminated Tank Chart

IFC Decal Package



- IFC Compliant Decaling



Ace FuelSafe Small Contractor Dispensing Package Specification:

Primary and secondary tank shall be manufactured to UL-142 standards from 10 gauge steel on both the head and shell. Seismic clips are provided for anchoring tank to slab and skids are available for crushed gravel installations. Fork pockets and lifting lugs are provided for tank placement. Tank finish includes epoxy primer undercoat and powder coat finish paint in FuelSafe blue or Ace tank bright white. Custom colors available upon request.

300 Gallon Double Wall UL-142 Aboveground Storage Tank

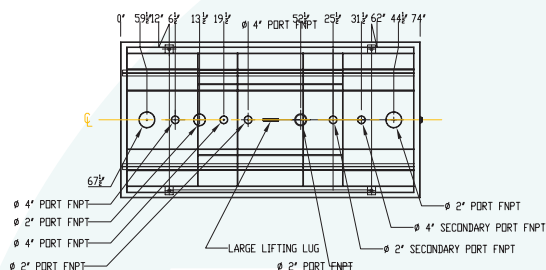

Design Specification

Label: UL-142 Double Wall

Built: UL-142

Primary Tank

Head Thickness: 10 Ga.

Shell Thickness: 10 Ga.

Maximum Operating Pressure:
7 kPa



Maximum Operating Vacuum:
N/A

Secondary Tank

Head Thickness: 10 Ga.

Shell Thickness: 10 Ga.

550 Gallon Double Wall UL-142 Aboveground Storage Tank

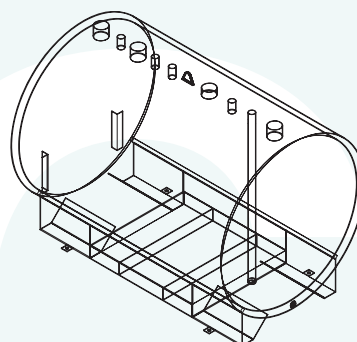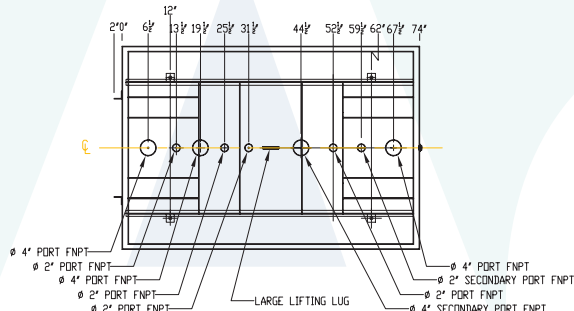

300 Gallon Tank

O.A. Dims 39" dia x 75"L
1,000 Lb.



550 Gallon Tank

O.A. Dims 51" dia x 75"L
1,400 Lb.

1,100 Gallon Tank

O.A. Dims 51" dia x 148"L
2,400 Lb.

1,100 Gallon Double Wall UL-142 Aboveground Storage Tank

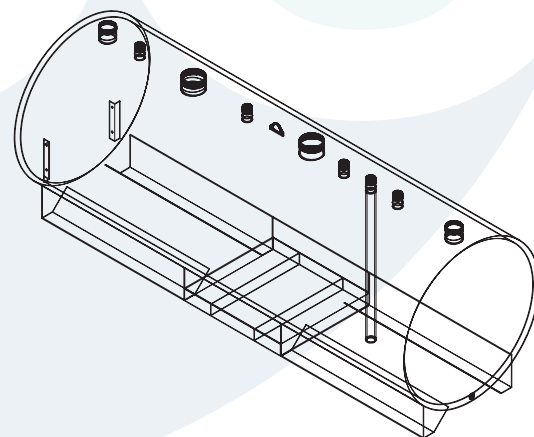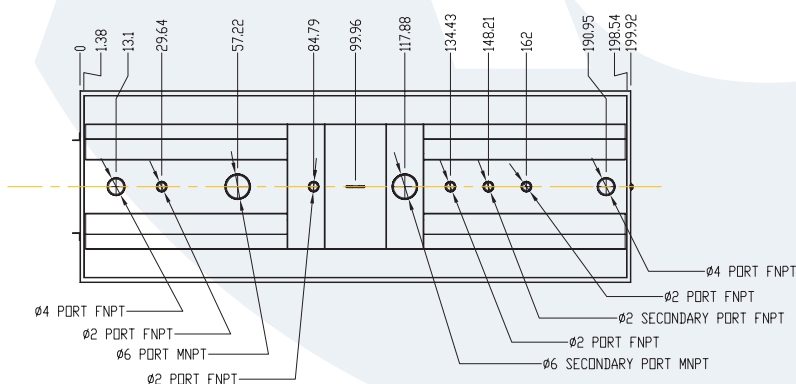

Phone: (800) 426-2880
E-mail: FuelSafeSystems@acetank.com



Durable Designs... Reliable Results

www.acetank.com