
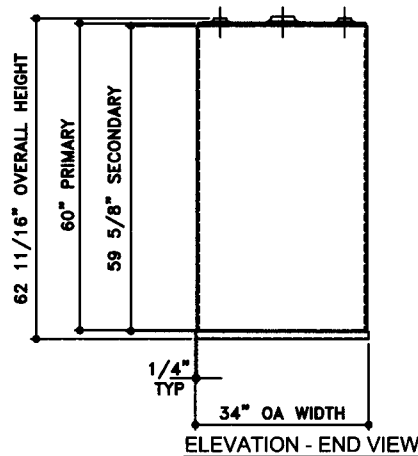
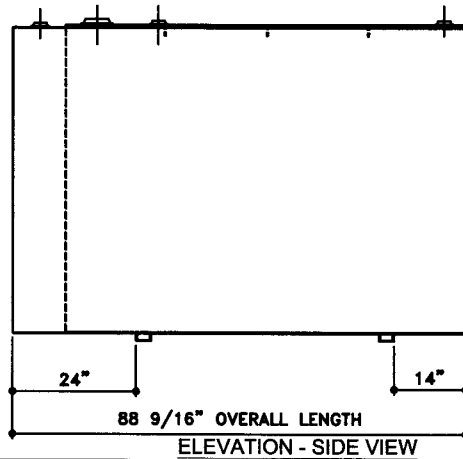


NOTE:  
 ALL TANK DIMENSIONS ARE INSIDE TO INSIDE EXCEPT FOR  
 SECONDARY HEIGHT DIMENSIONS ARE INSIDE BOTTOM TO TOP OF WALL

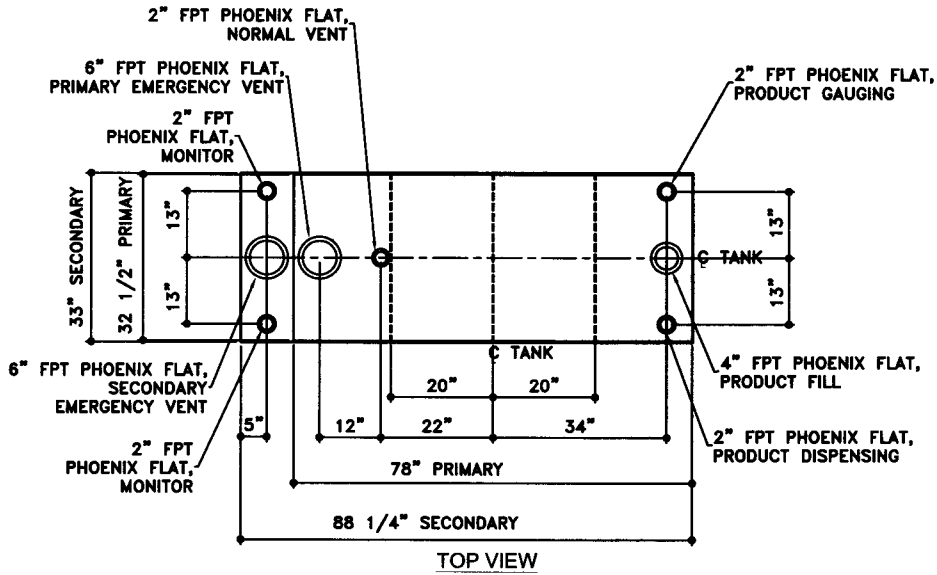

TOLERANCES		STEEL: ASTM A36 PRIMARY TANK TOP: 10 GAUGE (9/64") SIDES: 6 GAUGE (3/16") ENDS: 12 GAUGE (7/64") BOTTOM: 10 GAUGE (9/64") SECONDARY TANK TOP: 12 GAUGE (7/64") SIDES: 10 GAUGE (9/64") ENDS: 12 GAUGE (7/64") BOTTOM: 12 GAUGE (7/64")	COATING: "R" EXTERIOR COATING, ACE 1A RED SHOP COAT 1-3 MILS  "G" EXTERIOR COATING, ACE 1E GRAY SHOP COAT 1-3 MILS  INTERIOR: BARE STEEL	SPECIAL INSTRUCTIONS PLUG TIGHT WRENCH PLUG TIGHT WITH PIPE DOPE ON THREADS AND TESTED LEAK FREE.	APPROXIMATE SHIPPING WEIGHT 1,550 LBS.  TANK VENT CAPACITY 126,000 PRIMARY 126,000 SECONDARY	DRW BY
TANK						UL 142 (BUILT & LABELED) DOUBLE WALL TANK RECTANGLE TANK
CAPACITY	-0% / +10					1
OVERALL LENGTH	-0" / +1/2"					
OVERALL WIDTH	-0" / +1/2"					
OVERALL HEIGHT	-0" / +1/2"					
OTHER DIMENSIONS	-1/4" / +1/4"					
1-206-281-5000		<b>AceCube - 650 GALLON</b>				2
ACE PART No.	AC00650U2R1	QTY: 1				OF
(F:111ACSHOPRECTANGLU2R110065012-ORTHO.GCD-1:16)						
COPYRIGHT 1997 ACE TANK & EQUIPMENT						
						01-01-02 SUPERCEDES 09-01-01